

Igo M 14

The new standard Igo M



Come and see the video




Main features

- 19 m hook height (+3 m)
- 1800 kg maximum load
- 22 m maximum jib radius
- 600 kg load at jib noise

Key benefits

1 Easy and Fast erection

- Generator embended with remote start
- Fast erection with permanent ballasts
- Hydraulic leveling
- Improved erection check

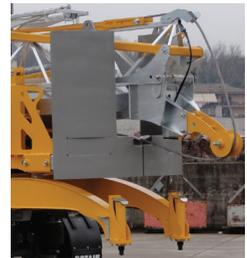

2 High jobsite accessibility

- Large manoeuvrability with the steering chassis
- Variable ballast radius
- Steering axles +/- 20°



Igo M 14, the new standard Igo M



3 Performance in operation


- 19 m hook height, 1.8 maximum load, 600 kg @ 22m
- Strong load curve
- Multiple jib positions : raised (2 positions) and folded jib

4 Versatility

- 2 energy options for : 230 v or 400 v
- Adjustable Tow bar or 5th wheel

5 Transport

- Availability in 25 km/h or 80 km/h

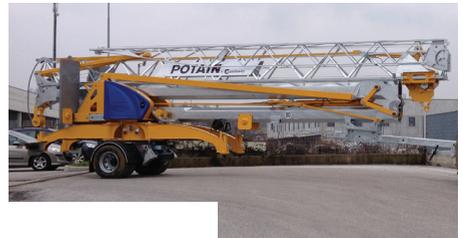

Service



Immediate response 24/7 provides the best support



Financing solutions for your project

www.manitowoccranes.com

Your contact